BElite Technologies

Specialists in LED Lighting

BElite Technologies

Company Profile

BELite Technologies Pty Ltd an original local designer, manufacturer, and supplier of LED lighting. We specialise in durable, customizable LED lights for the agricultural, outdoor and mining industry, as well as smart control lighting systems. We offer full solution LED systems with on site consultations to provide the best possible solution for any application. We offer various value added services and after sales support

Our in house engineering capabilities allows for LED light manufacturing in various voltages and specialised requirements. We offer repairability and retrofitting of existing light fittings, allowing for specialised, cost effective solutions. If you cannot find what you are looking for, contact us to do a customized quotation for you

BElite Technologies

+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BElite Technologies

Technical Capabilities and Services

SPECIALISED LIGHTING

Industrial, rugged, high-powered LED lights for the harsh,agricultural and mining environment. Manufactured for the harsh African environment

SPECIALISED LIGHTING CONTROL SYSTEMS

We are continuously striving towards innovative, high quality products with a sustainable footprint. New and custom designs are done in our in house R&D facility .

SPECIALISED LIGHTING CONTROL SYSTEMS

Specialised control systems allowing for controllable lighting systems allowing . Dimming capabilities between 0-100% without any flicker, programmable light profiles, intensity settings and timer control. Adjustable dusk-to-dawn that can be adjusted allowing for precision farming in any agricultural system.

CUSTOMIZED SOLUTIONS

We have a design team allowing for customize products according to customer specification. We also offer spectrum specific grow lights depending on unique crops

LOCAL MANUFACTURING

We believe in uplifting and empowering our own country leading to locally manufactured products, creating jobs and contributing to economic sustainability

LIGHTING DESIGNS AND SURVEYS

We offer simulations and lighting designs to provide the optimal light design to ensure safe and efficient working space illumination. For optimal plant and poultry growth unique lighting designs are provided to meet specific plant and poultry farm requirements

BElite Technologies

20-200W LED GROW LIGHT

The customised spectrum LED grow light is suitable as an artificial light source to stimulate plant growth. The spectrum specific light produces the fundamental wavelengths required for optimal photosynthetic rates, flowering, vegetation, fruiting and much more, decreasing plant growth time whilst increasing yield. Multiple wattage and design options are available ranging from 20 – 200W in either vertical hanging, horizontal mounted or 3-way and 4-way lights. Lights have a robust and waterproof design. Applications includes supplementary or sole source lighting for any horticultural applications, indoor plant growth, green houses and much more

12, 24, 48VDC
110-230VAC
50hz
0.35A @ 230 VAC

Model-dependent
DIMENSIONS

140°
LIGHT ANGLE

LED's
OSRAM
DRIVER
MW MEAN WELL
TECH

50000Hr
Ta=30°C @ L70
LIFE SPAN

Model-dependent
WEIGHT

>90%
EFFECIENCY

IP65
IP RATING

BElite Technologies
+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

CORRELATED COLOR TEMPERATURE

BE lite Technologies

600W LED

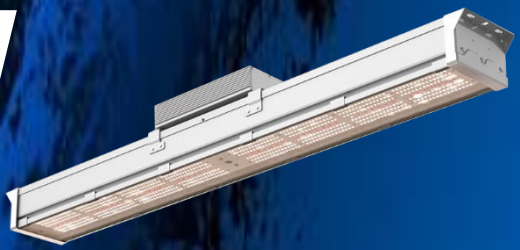

FULL SPECTRUM GROW LIGHT

The full spectrum 600W LED grow light is an ideal horticultural light. It can be used as sole or supplementary source lighting for any greenhouse application. Light is equip with aluminium extrusion allowing for optimal heat dissipation. The light has a high PPF up to 1380 µmol/s, allowing for optimal crop growth. Spectrum is adjustable for different crops, flowering, vegetation, UV and PPFD level

POWER
100-277 VAC
50-60hz
2.766A
@225VAC

DIMENSIONS
139 mm (H)
90 mm (W)
1177 mm (D)

LIGHT ANGLE
120°/
140°

TECH
LED's
OSRAM
DRIVER
INVENTRONICS

LIFE SPAN
50000Hr
Ta=30°C @
L70

WEIGHT
11.6kg

EFFECIENCY
95%

IP RATING
IP65

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

CORRELATED COLOR TEMPERATURE

BE lite Technologies

6-18W LED POULTRY GROW LIGHT

The LED poultry grow light is an unique combination of colour spectrums allowing for optimal production in various poultry systems. The spectrum specific light produces the fundamental wavelengths required for optimal production in broiler, laying and hatching systems. Various colour options are available depending on the poultry system, The robust, waterproof design allows for high pressure washing and extreme durability. Switching between colours allows for easier catching and calmer birds at the end of the production cycle (i.e. blue). Applications can include controlled lighting for hatcheries, sole source lighting or supplementary lighting in various poultry production systems

POWER
6W white
6W per color

DIMENSIONS
356mm (H)
51mm (W)
15mm (D)

LIGHT ANGLE
140°

TECH
LED' OSRAM
DRIVE MEAN WELL

LIFE SPAN
50000Hr
Ta=30°C @ L70

WEIGHT
0.9kg

EFFECIENCY
95%

IP RATING
IP67

BE lite Technologies
+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

CORRELATED COLOR TEMPERATURE

BE lite Technologies

LSMS LED LIGHT CONTROLLER

The LSMS (Light Spectrum Management System) is a control system used for full control of LED lights and LED grow lights. It is used in both poultry and plant applications. The LSMS has dimming capabilities between 0-100% without any flicker, programmable light profiles, intensity settings and timer control. The LSMS is equip with adjustable dusk-to-dawn settings, which the customer can adjust to fit their unique timing requirement. LSMS can control 9 independent groups, with each group containing 6 drivers* allowing for a total of 54 lights to be controlled. Control is compatible on various luminaires and is not restricted to grow lights only

IP RATING IP65

POWER 100-260 VAC 50hz
0.2A MAX @ 220 VAC

*Driver must have dim to zero capability

BE lite Technologies
+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

BE lite Technologies

Mobile Light Trailers

Solar/Generator

MOBILE/STATIONARY LIGHT TRAILERS

Light trailers can be equipped with a generator or solar panels. Inverter and batteries included in a sealed metal container with a screen indicating power level. Overcharge protection included on the charger.
Trailer is specified on area of light coverage, duration of operation and area or application of use, Light trailer can be customised to customers unique requirement.
Trailers are durable and solar panels vibration resistant for transport across rugged terrain.
Trailer has a motor controlled swivel mast.

Ideal for mining, tailings and construction areas where temporary lights are required for long periods without the cost of cabling.
Solar option is an economically efficient and environmentally friendly technology, with minimal maintenance and no fuel costs.

POWER 12, 24, 48VDC Or 220VAC

LUMENS 165 lm/W 11 880 lm

IP RATING IP65

TEC

LED's OSRAM

DRIVER BE lite

CCT 4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

50/100W LED

DRIVERLESS BULKHEAD RETROFIT

This design features an 4,5 mm aluminium backplate with a 50W or 100W LED module. It is a economically efficient solution allowing for replacement or retrofitting of LEDs instead of replacing entire luminaire fitting. Retrofit Is suitable for a variety of bulkheads and is easily mounted and adjusted. Can be custom manufactured in different sizes to fit 220VAC bulkhead light fittings. Fitting is vibration resistant making it optimal for use in high vibration areas such as conveyers and high vibration areas where other lights fail

POWER
50W/100W
220VAC 50hz
0.16A/0.32A @
220 VAC

DIMENSIONS
200mm (H)
90mm (W)
18mm (D)

LIGHT ANGLE
160°

TECH
LED's
LUMILEDS

LIFE SPAN
17500Hr
Ta=30°C @
L70

WEIGHT
0,2kg

LUMENS
70 lm/W
3500 lm

EFFECIENCY
>75%

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

72W LED

CURVED FLOODLIGHT

This design features an array of anodized aluminium extrusions and UHI with stainless steel side plates and brackets. Multiple optic options are available ranging from 30°/60° or wide angle diffused. Applications include security lighting, perimeter lighting, workplace lighting, outdoor lighting, camp lighting and more. Can be provided as 12/ 24/ 48VDC or 32VAC and 220VAC.

POWER
12,24 & 48 VDC
8.4 A @ 12 VDC
4.2 A @ 24 VDC
2.1 A @ 48 VDC
1A @ 220VAC

DIMENSIONS
300mm (H)
255mm (W)
150mm (D)

LIGHT ANGLE
30°/60°/ wide

TECH
LED's
OSRAM
DRIVER

LIFE SPAN
17500Hr
Ta=30°C @
L70

WEIGHT
3.5kg

LUMENS
165 lm/W
11 880 lm

EFFECIENCY
>75%

IP RATING
IP65

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

96W LED HIGHMAST

This design features an array of anodized aluminium extrusions and UHI. Multiple optic options are available ranging from 30°/60° or wide angle diffused. Applications include security lighting, perimeter lighting, workplace lighting, outdoor lighting, camp lighting and more. A great replacement for old MV/MH/HPS lighting technologies

POWER
96W
220VAC 50hz
0.45A @ 225 VAC

DIMENSIONS
490mm (H)
228mm (W)
55mm (D)

LIGHT ANGLE
30°/60°/wide

TECH
LED's
OSRAM
DRIVER
MEAN WELL

LIFE SPAN
50000Hr
Ta=30°C @ L70

WEIGHT
6.9kg

LUMENS
165lm/W
15500lm

EFFECIENCY
>90%

IP RATING
IP65

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

192W LED HIGHMAST

The 192W Highmast is a great replacement for old 400W MV/MH/HPS lighting technologies. With a higher lumen per watt ratio and higher lumen output you can save up to 70% electricity. With a selection of different lenses for different areas and applications it makes a great luminaire that will suit your lighting needs. Applications include factory, warehouse, workplace, outdoor lighting and more.

POWER
192W
100-224 VAC
50hz
2A @ 224 VAC

DIMENSIONS
490mm (H)
470mm (W)
80mm (D)

LIGHT ANGLE
30°/60°/wide

TECH
LED's
OSRAM
DRIVER
MEAN WELL

LIFE SPAN
50000Hr
Ta=30°C @
L70

WEIGHT
11.5kg

LUMENS
165 lm/W
27000 lm

EFFECIENCY
>90%

IP RATING
IP65

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

100-200W LED HIGHBAY

Designed specifically for any warehouse, storage facilities, distribution area or work areas. Multiple optic options ; 30°/ 60°/ 90°/120° allowing for targeted lighting in specific areas. Fixture is easily suspended with an eyebolt allowing for easy installation and easy replacement of existing fittings. Ideal replacement for traditional 400W HID lights.

POWER
200W
220VAC 50hz
0.9A @ 225 VAC

DIMENSIONS
400mm (H)
410mm (W)
410mm (D)

LIGHT ANGLE
30°/60°/90°/
120°

TECH
LED's
PHILIPS
DRIVER
PHILIPS

LIFE SPAN
50000Hr
Ta=30°C @
L70

WEIGHT
7kg

LUMENS
140 lm/W
28000 lm

EFFECIENCY
>90%

IP RATING
IP65

CCT
5700K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

360W LED HIGHMAST

The 360W Highmast Light is a great replacement for old 600W-1000W MV/MH/HPS lighting technologies. With a higher lumen per watt ratio and higher lumen output you can save up to 70% electricity. Optic options are available in 30°/60° or wide angle diffused and the light can be flat or curved 180 degrees for wider light coverage. Applications include factory, warehouse, workplace, outdoor lighting, high mast lighting and more.

POWER
360W
100-240 VAC
50hz
2A @ 224 VAC

DIMENSIONS
620mm (H)
490mm (W)
80mm (D)

LIGHT ANGLE
30°/60°/wide

TECH
LED's
OSRAM
DRIVER
MEAN WELL

LIFE SPAN
17500Hr
Ta=30°C @ L70

WEIGHT
18kg

LUMENS
165 lm/W
59000 lm

EFFECIENCY
>90%

IP RATING
IP65

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BElite Technologies

600W LED FLOOD LIGHT

Multiple wattage options ranging from 200W to 2000W. 200W per module, Easily and quickly assembled. Universal angle adjustment-horizontally and vertically, Easily adjustable light angles can create diversity in lighting environments. Multiple optic options from 10°/15°/30° or 20x60°. Applications include sport field, parking lot, head gear, shipping dock lighting and more.

POWER
600W
220VAC 50hz
2.8A @ 224 VAC

DIMENSIONS
528mm (H)
340mm (W)
220mm (D)

LIGHT ANGLE
20°x60°

TECH
LED's
OSRAM
DRIVER
INVENTRONICS

LIFE SPAN
50000Hr
Ta=30°C @ L70

WEIGHT
14.5kg

LUMENS
135 lm/W
81 000 lm

EFFECIENCY
>90%

IP RATING
IP67

CCT
5000K

CORRELATED COLOR TEMPERATURE

BElite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

100W LED STREETLIGHT

Multiple wattage options ranging from 50W to 300W. Light comes in an attractive black aluminium housing with the driver fitted neatly inside. Multiple optic options: 155x80°/ 165x115°/ 90x120°/90° and 60°. Easily mounted and adjusted. The unique rectangular lens makes for ideal road, parking lot and outdoor flood lighting.

POWER
100W
220VAC 50hz
0.45A @ 225 VAC

DIMENSIONS
554mm (H)
300mm (W)
82mm (D)

LIGHT ANGLE
80°x155°/155x80°/
165x115°/
90x120° /90°/60°

TECH
LED's
LUMILEDS
DRIVER
MEAN WELL

LIFE SPAN
50000Hr
Ta=30°C @
L70

WEIGHT
5kg

LUMENS
140 lm/W
14000 lm

EFFECIENCY
>90%

IP RATING
IP65

CCT
5700K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BElite Technologies

20-80W LED SOLAR STREET LIGHT

The solar streetlight is an ALL-IN-ONE design with a solar panel, battery and LED light combined in one unit. An internal controller charges the light during the day and provides lighting at night. Normal output is 15W to conserve battery power, which increases to 40W when an object is detected. The light has a motion sensor to switch between the two intensities as necessary.

POWER
40W
No External Power Needed

DIMENSIONS
930mm (H)
320mm (W)
135mm (D)

LIGHT ANGLE
30x140°

TECH
LED's
BRIDGELUX

LIFE SPAN
50000Hr
Ta=30°C @ L70

WEIGHT
9kg

LUMENS
110 lm/W
4400 lm

EFFECIENCY
>90%

IP RATING
IP65

CCT
4500K

CORRELATED COLOR TEMPERATURE

BElite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

LED LOW PROFILE LIGHTS

This design features an anodized aluminium extrusions and a clear, diffused or prismatic lens. Multiple wattage options are available ranging from 24W/42W or 60W. Various voltage supplies are available, including 12/24/48VDC or 220VAC. Applications include workshop lighting, camp lighting, cab lighting, corridor lighting and more. Lights can be supplied as lights with or without drivers

POWER	Model-dependent	DIMENSIONS	Model-dependent	LIGHT ANGLE	140°
TECH	LED's OSRAM	LIFE SPAN	17500Hr Ta=30°C @ L70	WEIGHT	Model-dependent
LUMENS	165lm/W	EFFECIENCY	>80%	IP RATING	IP65

CCT 4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

24W LED WINCH LIGHT

This design features an anodized aluminium extrusion and a clear, diffused or prismatic lens. Multiple wattage options are available ranging from 24W/42W or 60W. Various voltage supplies are available, including 48VDC/32VAC or 220VAC. Can be equip with a specialised plug. Applications include winch lighting, workshop lighting, cab lighting and more

POWER
24W
32 VAC
0.75A @ 32 VAC

DIMENSIONS
253mm (H)
120mm (W)
76mm (D)

LIGHT ANGLE
140°

TECH
LED's
OSRAM
DRIVER
BE lite

LIFE SPAN
17500Hr
Ta=30°C @
L70

WEIGHT
0.95kg

LUMENS
144 lm/W
3200 lm

EFFECIENCY
>75%

IP RATING
IP65

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

BE lite Technologies

6W LED WINCH LIGHT

This design features an anodized aluminium extrusions and a clear, diffused or prismatic lens. Multiple wattage options are available ranging from 6W/ 12W and 24W in 32VAC. Equip with a transformer box if input voltage is 380VAC or 525VAC. Applications include winch lighting, workshop lighting and more.

POWER
6W
32 VAC
0.187A @ 32 VAC

DIMENSIONS
164mm (H)
66mm (W)
58mm (D)

LIGHT ANGLE
140°

TECH
LED's
OSRAM
DRIVER
BE lite

LIFE SPAN
17500Hr
Ta=30°C @
L70

WEIGHT
0.2kg

LUMENS
144 lm/W
800 lm

EFFECIENCY
>75%

IP RATING
IP65

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

48W LED FLOOD LIGHT

This design features an array of anodized aluminium extrusions and UHI with UV resistant lens covers, aluminium side plates and stainless steel brackets. Multiple optic options are available ranging from 30°/45°/60° lenses or wide angle diffused. Applications include security, perimeter, workplace, outdoor, camp lighting and more.

POWER
48W
100-240 VAC
50hz
0.41A @ 230 VAC

DIMENSIONS
285mm (H)
275mm (W)
125mm (D)

LIGHT ANGLE
30°/45°/60°/wide

TECH
LED's
OSRAM
DRIVER
MEAN WELL

LIFE SPAN
50000Hr
Ta=30°C @
L70

WEIGHT
4,3kg

LUMENS
165 lm/W
7500 lm

EFFECIENCY
>90%

IP RATING
IP65

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

BE lite Technologies

12W LED WARNING LIGHT

Multiple colour options are available including, red, amber, white, blue and green. The robust aluminium enclosure makes it suitable for harsh conditions. Single-, Bi-, Tri- and Quad-colour versions are available where different flashing sequences can be programmed. Lights are available with or without sirens. Applications include mining, industrial, construction and any other application where indicative lighting is required.

POWER	12W 24 VDC 0.34A @ 24 VDC	DIMENSIONS	Model-dependent	LIGHT ANGLE	360°
TECH	LED's OSRAM DRIVER BE lite	LIFE SPAN	17500Hr Ta=30°C @ L70	WEIGHT	Model-dependent
LUMENS	104 lm/W 800 lm	EFFECIENCY	>75%	IP RATING	IP65

BE lite Technologies

+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

CORRELATED COLOR TEMPERATURE

BE lite Technologies

4W LED HOPPER LIGHT

The hopper light is a robust, aluminium, water resistant luminaire fit for tough and humid environments. Available with 2-stage lighting (white and red steady) and is battery powered, allowing for mobility in the field. One button operation allows for easy switching between functions and the light is equip with two magnets for effective mounting. Multiple colour spectrums are available. Applications include lighting for underground hopper indication, guard car lighting, mining vehicle lighting, local mobile lighting as well as construction lighting.

POWER
4W
12-24 VDC
0.5A @ 24 VDC

DIMENSIONS
65mm (H)
100mm (W)
80mm (D)

LIGHT ANGLE
8°

TECH
LED's
OSRAM
DRIVER
BE lite

LIFE SPAN
17500Hr
Ta=30°C @
L70

WEIGHT
0.6kg

LUMENS
White: 144 lm/W
White: 288 lm
Red 104 lm/W
Red: 80 lm

EFFECIENCY
>75%

IP RATING
IP65

CCT
4000K

CORRELATED COLOR TEMPERATURE

BE lite Technologies
+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

BElite Technologies

3W LED INDICATOR LIGHT

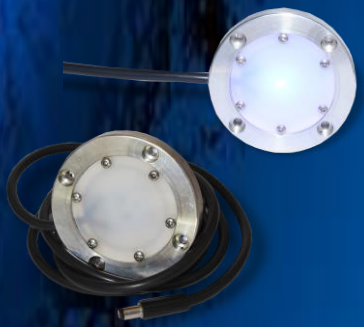

The indicator Light serves multiple purposes in all kinds of environments where an indicative flashing or steady light is required. With the option of red, blue, amber or green the indicator light can be used in any application. It's robust housing and small form factor makes it suitable for most harsh environments with easy installation.

POWER	3W 220VAC 50hz 0.01A @ 220 VAC	DIMENSIONS	70mm (H) 70mm (W) 12mm (D)	LIGHT ANGLE	160°
TECH	LED's OSRAM DRIVER BElite	LIFE SPAN	8750Hr Ta=30°C @ L70	WEIGHT	0.1kg
LUMENS	Model-dependent	EFFECIENCY	>75%	IP RATING	IP65

BElite Technologies

+27 011 397 6074
sales@belite.co.za
www.belite.co.za

Jet Park
Boksburg
South Africa

CORRELATED COLOR TEMPERATURE

BElite Technologies

12W LED FLASHING LIGHT

The robust aluminium enclosure and completely waterproof design makes it suitable for harsh conditions where indicative flashing lights are required. Various colour spectrums (blue, red, green, white, amber) and flashing sequences are available. The light is equip with two magnets for easy mounting and removal on machinery and vehicles. Applications include patrol vehicle lighting, security warning lighting, moving machinery lighting, indicative lighting in high risk areas or construction sites.

POWER	12W 12VDC 1A Max @ 12VDC	DIMENSIONS	75x104x65 mm	LIGHT ANGLE	Bi-directional 45°
TECH	LED's OSRAM DRIVER BElite	LIFE SPAN	17500Hr Ta=30°C @ L70	WEIGHT	0.6kg
LUMENS	N/A	EFFECIENCY	>75%	IP RATING	IP68

BElite Technologies
+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

CORRELATED COLOR TEMPERATURE

BElite Technologies

3W LED INDICATOR LIGHT

The indicator Light serves multiple purposes in all kinds of environments where an indicative lighting is required. With the option of red, blue, amber or green the indicator light can be used in any application. Single-, bi-, tri- and quad- colour versions are available. It's robust housing makes it suitable for most harsh environments and the light is completely waterproof. Lights can be used in any application where traffic control is required, such as the mining and construction industries.

POWER
3W
220VAC 50hz
0.01A @ 220 VAC

DIMENSIONS
90mm (H)
90mm (W)
70mm (D)

LIGHT ANGLE
30°

TECH
LED's
OSRAM
DRIVER
BElite

LIFE SPAN
8750Hr
Ta=30°C @ L70

WEIGHT
1kg

LUMENS
Model-dependent

EFFECIENCY
>75%

IP RATING
IP68

BElite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

CORRELATED COLOR TEMPERATURE

BElite Technologies

4W LED INDICATOR LIGHT

4W Indicator lights are used where indicative flashing lights are required. Various colour spectrums and flashing sequences are available as well as optional battery back up. Colour spectrums and flash sequences can be programmed according to requirement. Applications include security warning lighting, moving machinery lighting, tower and mast lighting as well as indicative lighting in high risk areas or construction sites.

POWER
4W
12 VDC
0.33A @ 12 VDC

DIMENSIONS
100mm (H)
100mm (W)
47mm (D)

LIGHT ANGLE
360°

TECH
LED's
OSRAM
DRIVER
BElite

LIFE SPAN
8750Hr
Ta=30°C @ L70

WEIGHT
0.45kg

EFFECIENCY
>75%

IP RATING
IP65

BElite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

CORRELATED COLOR TEMPERATURE

BE lite Technologies

8W LED BEACON LIGHT

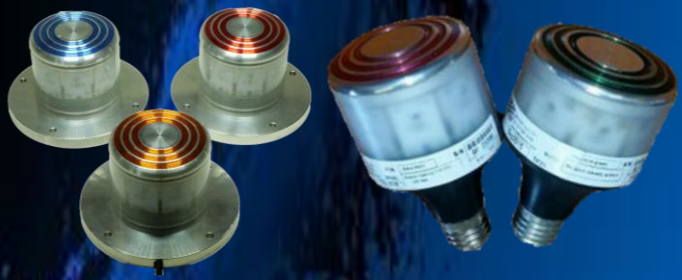

Beacon lights are multi colour warning lights used where indicative flashing lights are required. Single-, bi-, tri- and quad-colour versions are available and colours range from red, amber, blue, white or green. Colour spectrums and flash sequences can be programmed according to requirement. Can be used with or without a siren. Applications include security warning lighting, moving machinery lighting, tower and mast lighting as well as indicative lighting in high risk areas or construction sites.

POWER	220 VAC 50Hz 0.05A @ 220 VAC	DIMENSIONS	130mm (H) 70mm (W)	LIGHT ANGLE	360°
TECH	LED's OSRAM DRIVER BE lite	LIFE SPAN	8750Hr Ta=30°C @ L70	WEIGHT	0.80kg
LUMENS	144lm/W	EFFECIENCY	>75%	IP RATING	IP65

BE lite Technologies

+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

CORRELATED COLOR TEMPERATURE

BE lite Technologies

INFRARED LED LIGHT

The Infrared Floodlight improves visibility at night by increasing the level of Infrared luminosity for IR sensitive cameras. The light produced is invisible to the human eye and can only be seen by the camera. This is especially effective when a wide area needs to be monitored and existing IR is insufficient or dark spots require higher IR illumination.

POWER: 24 VDC

DIMENSIONS: 85mm (H) 40mm (W) 65mm (D)

WEIGHT: 0,5kg

TECH: LED's OSRAM DRIVER BE lite

LIFE SPAN: 17500Hr Ta=30°C @ L70

IP RATING: IP65

EFFECIENCY: >75%

BE lite Technologies

+27 011 397 6074
sales@belite.co.za
www.belite.co.za

Jet Park
Boksburg
South Africa

BElite Technologies

4W LED TAILLIGHT

The 4W vehicle taillight features a 10mm anodized aluminium design and receded UHI, allowing for a very robust design and durability. It is ideal for trucks, mining vehicles and large scale machines exposed to harsh conditions. It is available in 12/24/48 VDC. Various colour spectrums available.

POWER	12W 12 VDC 1A @ 12 VDC	DIMENSIONS	190mm (H) 190mm (W) 11mm (D)	LIGHT ANGLE	160°
TECH	LED's OSRAM DRIVER BElite	LIFE SPAN	17500Hr Ta=30°C @ L70	WEIGHT	0.5kg
LUMENS	144 lm/W 400lm	EFFECIENCY	>75%	IP RATING	IP65

BElite Technologies

+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa

CORRELATED COLOR TEMPERATURE

BElite Technologies

4W LED TRAFFIC LIGHT

The 4W traffic indicator light has a robust aluminium design to allow for extremely harsh environments and is completely waterproof. Lights can be designed in various voltage supplies and can be supplied as bi- or tri-colour, in any colour spectrum. Lights can be used in any application where traffic control is required, such as the mining and construction industries.

POWER
4W
24 VDC
0.33A @ 24 VDC

DIMENSIONS
182mm (H)
91mm (W)
50mm (D)

LIGHT ANGLE
120°

TECH
LED's
OSRAM
DRIVER
BElite

LIFE SPAN
17500Hr
Ta=30°C @ L70

WEIGHT
0.8kg

LUMENS
N/A

EFFECIENCY
>75%

IP RATING
IP69

BElite Technologies
+27 011 397 6074
sales@belite.co.za
www.belite.co.za
Jet Park
Boksburg
South Africa

CORRELATED COLOR TEMPERATURE

BE lite Technologies

Scan for more information

BE lite Technologies
+27 011 397 6074 Jet Park
sales@belite.co.za Boksburg
www.belite.co.za South Africa